


General Specifications

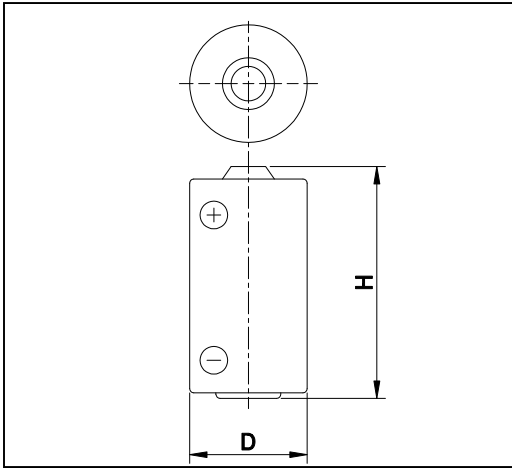

Nominal Voltage (V)		3
Nominal Capacity (mAh) *1		1900
Standard Discharge Current (mA)		0.5
Operating Temperature Range (°C) *2		-40 ~ +85
Max. Dimensions (mm)	Diameter (D)	17.0
	Height (H)	33.5
Approx. Weight (g)		16

*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.

*2 Consult FDK when using batteries at temperatures exceeding the -20°C to +60°C range.


Note) Battery Handling Precautions

English) http://www.fdk.com/battery/lithium_e/caution/


Japanese) <http://www.fdk.co.jp/battery/lithium/caution/>

Typical Characteristics (Estimated Curve)


Temperature Characteristics of CR2/3 8-L

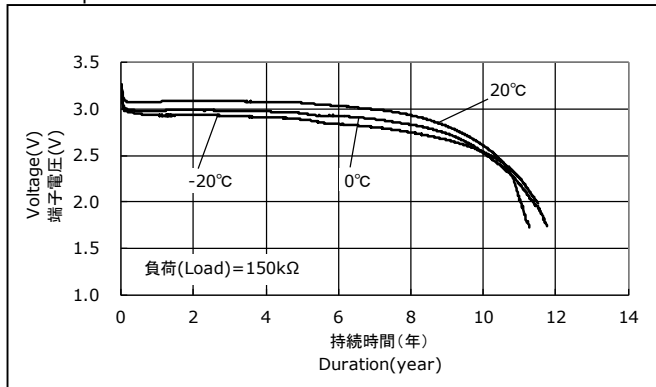


Temperature Characteristics of CR2/3 8-L

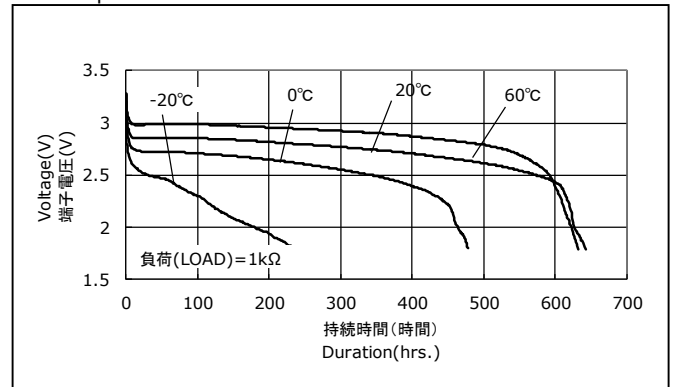

Pulse discharge Characteristics of CR2/3 8-L

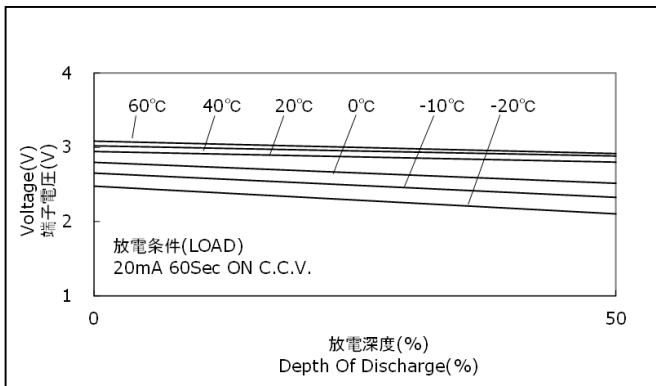

Discharge Load vs. Cell Capacity of CR2/3 8-L

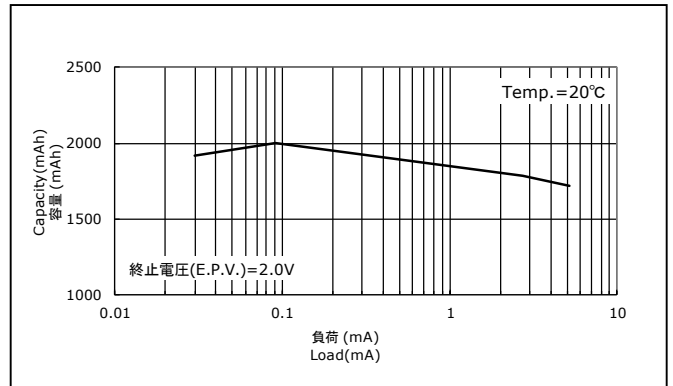

The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.