


### General Specifications

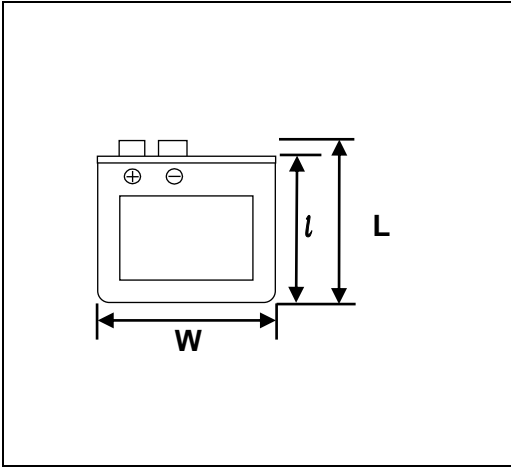

Nominal Voltage (V)		3
Nominal Capacity (mAh) <sup>*1</sup>		22
Standard Discharge Current (mA)		0.25
Operating Temperature Range (°C)		-10 ~ +60
Max. Dimensions (mm)	Length(L(l))	25.5(22.5)
	Width (W)	27.5
	Thickness (T)	0.55
Approx. Weight (g)		0.5

\*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23 °C.


Note) Battery Handling Precautions

English) [http://www.fdk.com/battery/lithium\\_e/handling\\_precaution.html](http://www.fdk.com/battery/lithium_e/handling_precaution.html)


Japanese) [http://www.fdk.co.jp/battery/lithium/handling\\_precaution.html](http://www.fdk.co.jp/battery/lithium/handling_precaution.html)

### Typical Characteristics


Temperature Discharge Characteristics

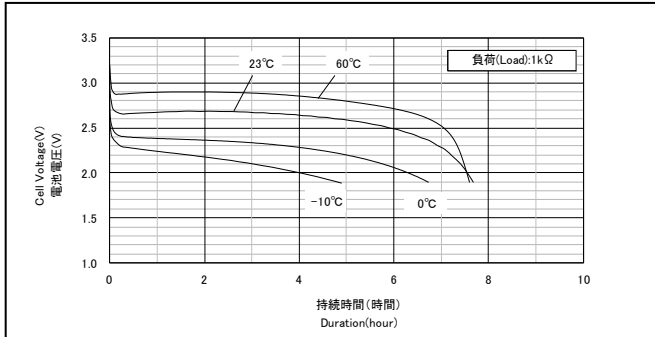


Temperature Discharge Characteristics

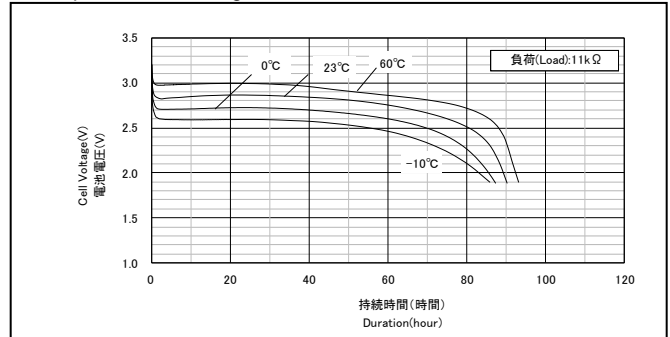


Temperature Discharge Characteristics

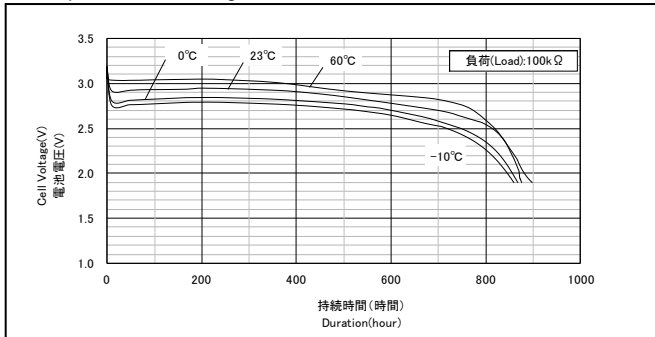

Discharge Characteristics after Storage

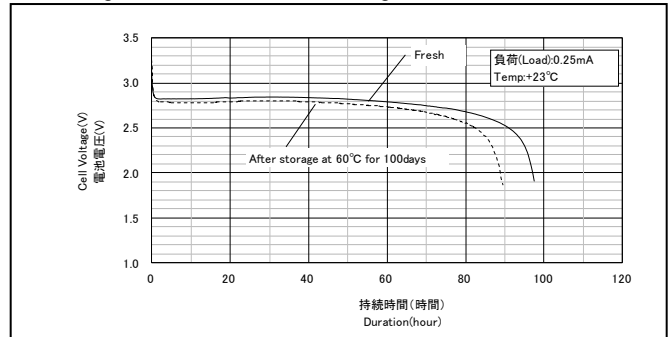

Discharge Load vs. Capacity

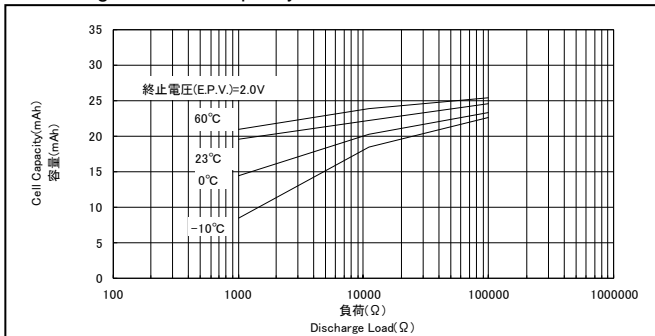

Discharge Load vs. Operating Voltage

