


Data sheet CF052722U

General Specifications



Nominal Voltage (V)		3
Nominal Capacity (mAh) ^{*1}		22
Standard Discharge Current (mA)		0.25
Operating Temperature Range (°C)		-10 ~ +60
Max. Dimensions (mm)	Length(L(l))	25.5(22.5)
	Width (W)	27.5
	Thickness (T)	0.55
Approx. Weight (g)		0.5

^{*1} Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23 °C.


Note) Battery Handling Precautions

English) https://www.fdk.com/product_e/lithium_e/caution/


Japanese) <https://www.fdk.co.jp/product/lithium/caution/>

Typical Characteristics


Temperature Discharge Characteristics

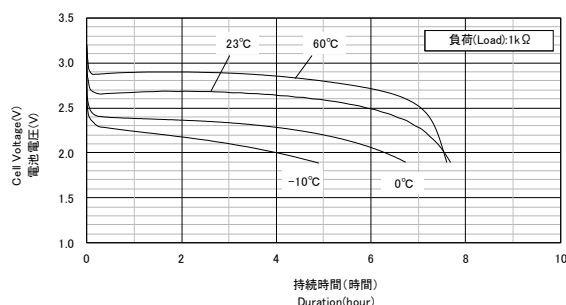


Temperature Discharge Characteristics

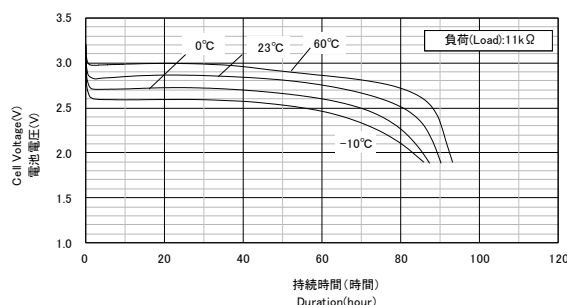


Temperature Discharge Characteristics

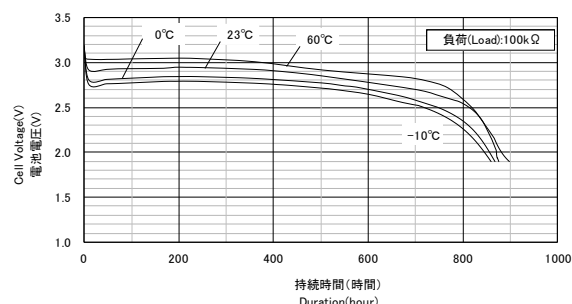

Discharge Characteristics after Storage

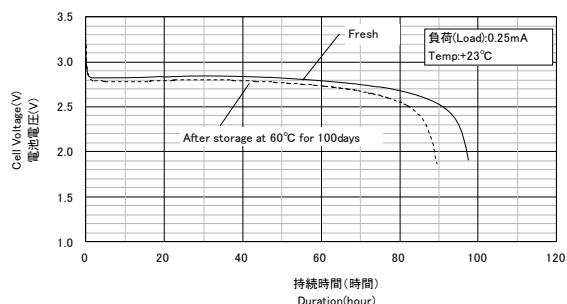

Discharge Load vs. Capacity

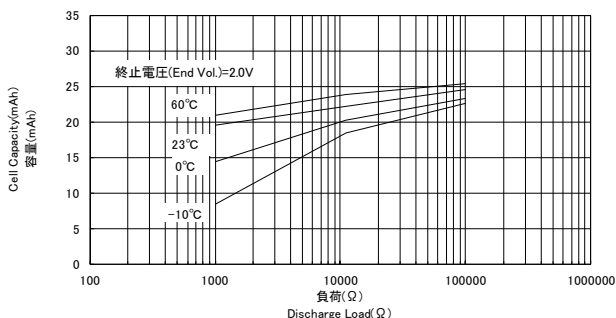

Discharge Load vs. Operating Voltage

